



SCALE 1:20

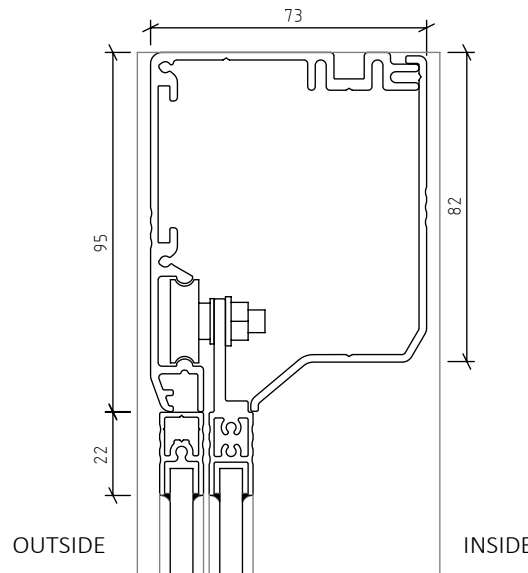

SECTION A-A
SCALE 1:2

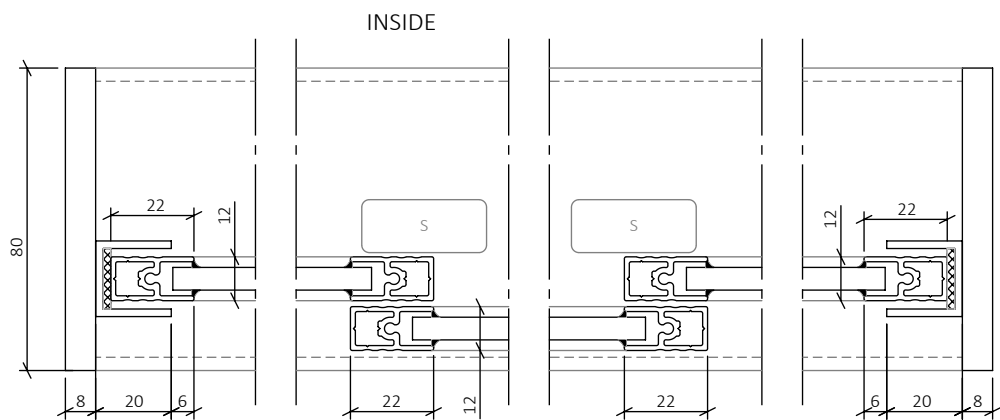

SECTION B-B
SCALE 1:2

OUTSIDE

EXPLANATIONS

ELECTRICALLY OPERATED SLIDING WINDOW, ERGOSAFE H80 3-PANEL B. WINDOW OPENS HORIZONTALLY. NON-INSULATED, INTENDED FOR INDOOR USE. ALL DIMENSIONS GIVEN IN MILLIMETERS.

WALL OPENING, WIDTH: FOD+ 10 MM
WALL OPENING, HEIGHT: FOD+ 5 MM

OPERATION

WINDOW IS EQUIPPED WITH ELECTRIC LOCK AND IMPULSE CONTROL WITH SAFETY BUFFERS. AUTOMATIC LOCK IN CLOSED POSITION. MOTOR AND DRIVE ARE INTEGRATED IN THE WINDOW DESIGN. CONNECTS TO 230 V WALL OUTLET. POWER ADAPTER AND PUSH BUTTON KEYPAD WITH 2 METER CORD INCLUDED.

SURFACE FINISH


NATURAL ANODIZED ALUMINIUM AS STANDARD. CAN BE PAINTED OR ANODIZED IN OTHER COLOURS (RAL/NCs).

GLASS

6 MM LAMINATED GLASS AS STANDARD (SAFETY GLASS). CUSTOMIZED UP TO 9 MM THICKNESS, DEPENDING ON LOCATION AND REQUIREMENTS.

OPTIONS

AVAILABLE IN DIFFERENT DESIGNS AND IN MANUAL VERSION. PLEASE CONTACT ERGOSAFE FOR FURTHER INFORMATION

 www.ergosafe.se	Category ELECTRICALLY OPERATED SLIDING WINDOW	Date 2023-10-30
	Description H80 3-PANEL B	Scale 1:2 (A4)
	Drawn By EI	Drawing number 20010-0009