


SCALE 1:20

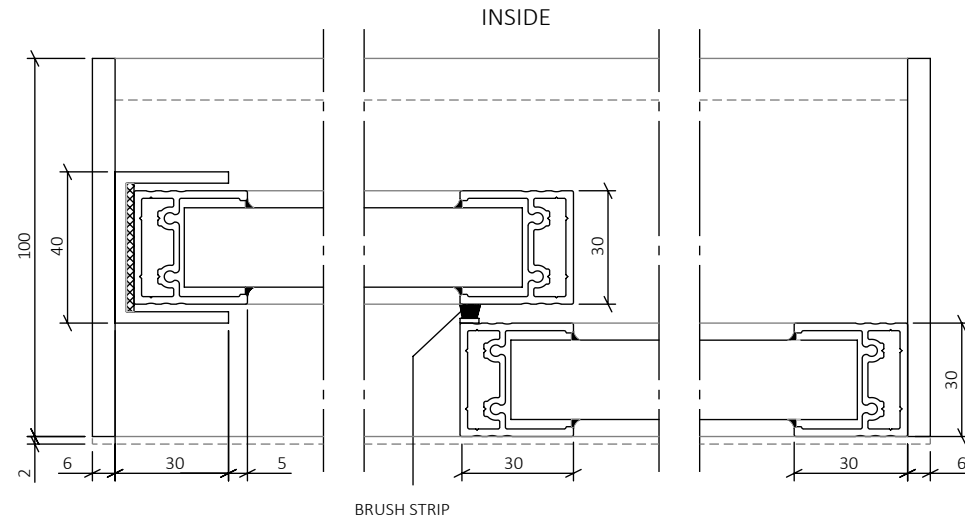

SECTION B-B  
SCALE 1:2

OUTSIDE

**EXPLANATIONS**

ELECTRICALLY OPERATED SLIDING WINDOW, ERGOSAFE SLIDEITUP 2-PANEL. WINDOW OPENS HORIZONTALLY. DESIGNED FOR USE IN CLIMATE BOUNDARIES WITH A STAINLESS ELECTRICALLY HEATED BASE PLATE. ALL DIMENSIONS GIVEN IN MILLIMETERS.

WALL OPENING, WIDTH: FOD+ 10 MM  
WALL OPENING, HEIGHT: FOD+ 5 MM

**OPERATION**

WINDOW IS EQUIPPED WITH ELECTRIC LOCK AND IMPULSE CONTROL WITH SAFETY BUFFERS. AUTOMATIC LOCK IN CLOSED POSITION. MOTOR AND DRIVE ARE INTEGRATED IN THE WINDOW DESIGN. CONNECTS TO 230 V WALL OUTLET. POWER ADAPTER AND PUSH BUTTON KEYPAD WITH 2 METER CORD INCLUDED.

**SURFACE FINISH**


NATURAL ANODIZED ALUMINIUM AS STANDARD. CAN BE PAINTED OR ANODIZED IN OTHER COLOURS (RAL/NCs).


**GLASS**

D4-12 TEMPERED INSULATING GLASS AS STANDARD (SAFETY GLASS). CUSTOMIZED UP TO 24 MM THICKNESS, DEPENDING ON LOCATION AND REQUIREMENTS.

**OPTIONS**

AVAILABLE IN DIFFERENT DESIGNS AND IN MANUAL VERSION. PLEASE CONTACT ERGOSAFE FOR FURTHER INFORMATION.

 <p>www.ergosafe.se</p>	<p>Category ELECTRICALLY OPERATED SLIDING WINDOW</p>	<p>Date 2023-10-30</p>
	<p>Description SLIDEITUP 2-PANEL</p>	<p>Scale 1:2 (A4)</p>
	<p>Drawn By EI</p>	<p>Drawing number 20070-0007</p> <p>Rev -</p>

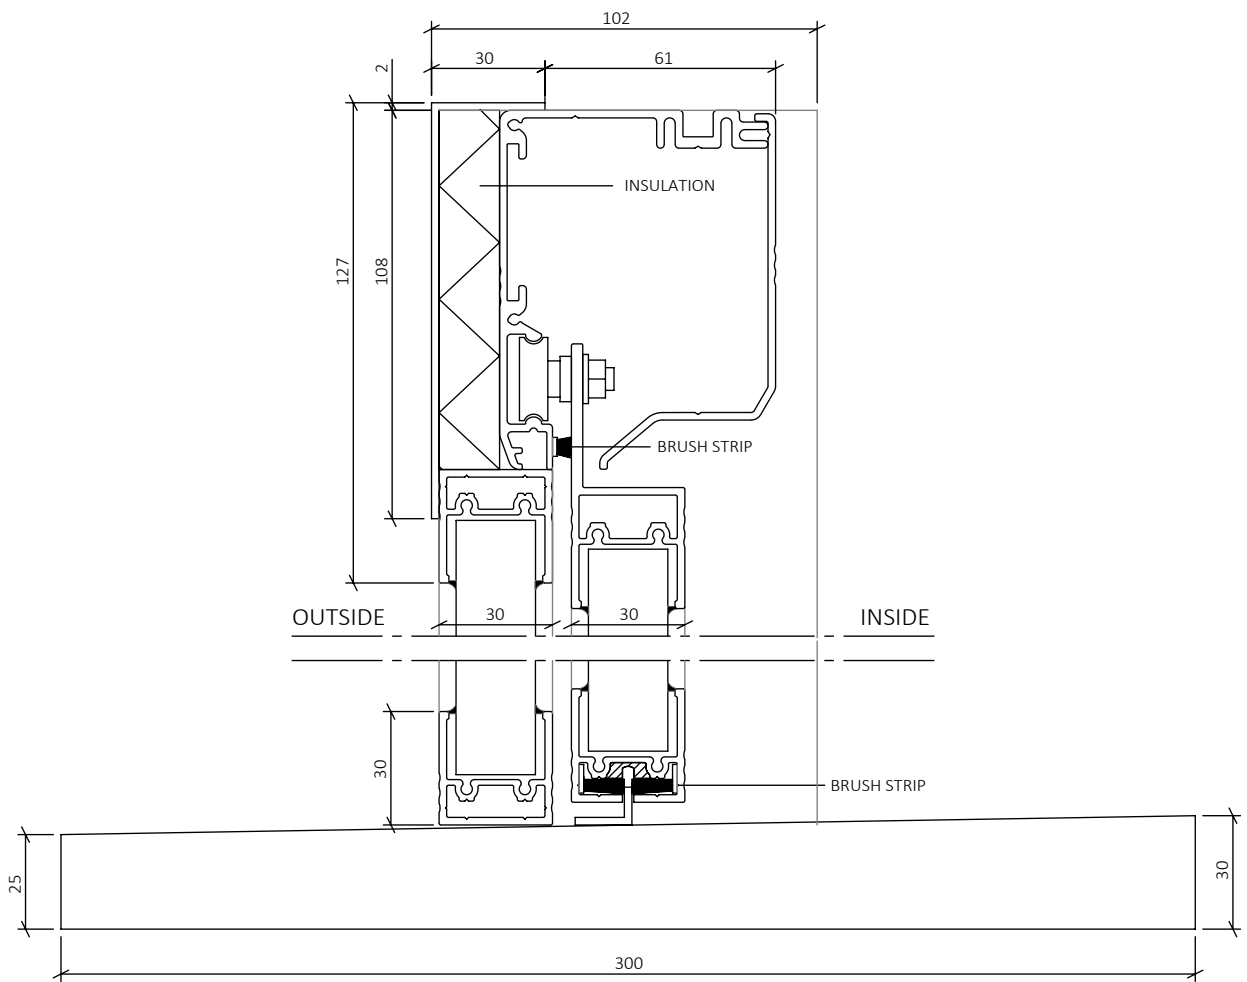

SECTION A-A  
SCALE 1:2

**ErgoSafe**<sup>®</sup>  
FLEXIBLE GLASS SOLUTIONS

www.ergosafe.se

Category  
ELECTRICALLY OPERATED SLIDING WINDOW

Description  
SLIDEITUP 2-PANEL

Drawn By  
EI

Date  
2023-10-30

Scale  
1:2 (A4)

Drawing number  
20070-0007

Rev  
-