




Panora-View (GUM) Medium - Window and door

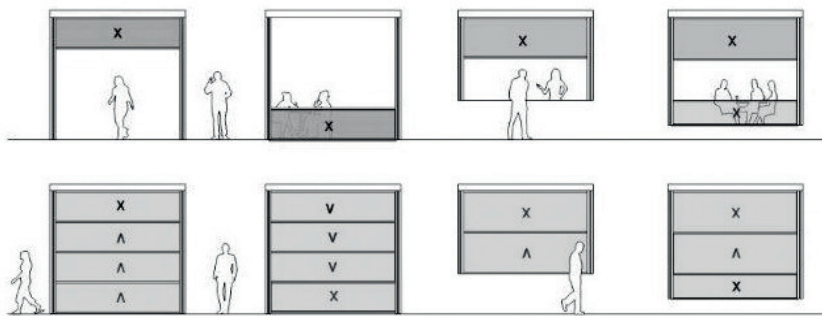

- Available as window and door
- Best for restaurants, residential and retail projects
- Thermally broken profiles and frames
- Excellent heat insulation, $U_w = 1.6$
- Pane thickness up to 32 mm
- Gear drive, 120 mm tubular motor
- Largest opening area 16 m²
- Largest operable frame, 300 kg
- Aesthetic appearance
- Minimalistic frames

Glazing	Insulating double pane (various options). The total glass thickness may be up to 32 mm.
Thermally broken profiles	All models
Maximum width	4.0 m, minimum with 1.5 m
Maximum height	4.0 m
Surfacing	Electrostatic powder lacquer
Motor type	220 V AC 50/60 Hz tubular motor 120 Nm gear drive
Control system	Deadman's handle (press and hold)
Uw value	$U_w = 1.56$. The total heat transfer coefficient (U_w) can become $U_w = 1.56$ if type Ug 1.1 glass is used.
Airtightness EN 12207	Nominal class 4 / Actual class 3
Watertightness EN 12208	Nominal class A7 / Actual class A7
Resistance to wind load EN 12210	Nominal class 3 / Actual class 3c
Maximum frame weight with glass	300 kg