



SCALE 1:20

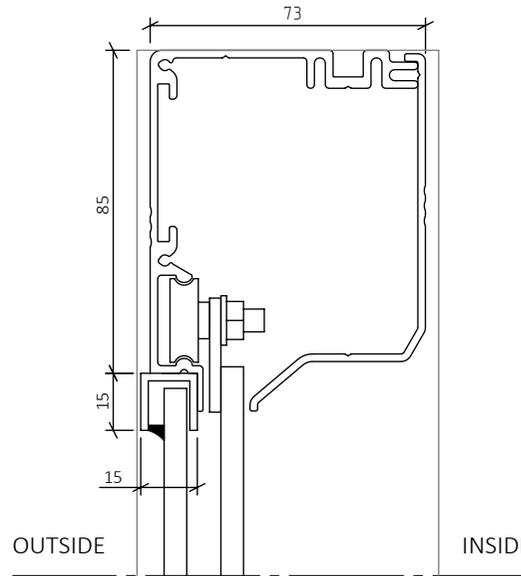

SECTION A-A
SCALE 1:2

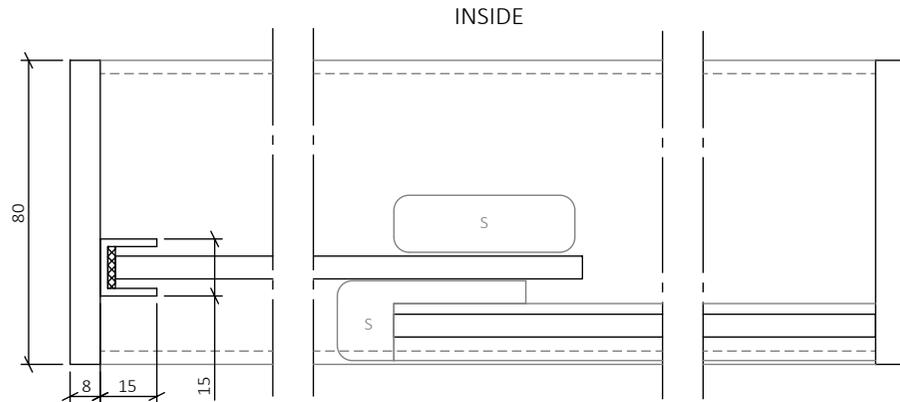

SECTION B-B
SCALE 1:2

EXPLANATIONS

ELECTRICALLY OPERATED SLIDING WINDOW, ERGOSAFE H80RG 2-PANEL. WINDOW OPENS HORIZONTALLY. NON-INSULATED, INTENDED FOR INDOOR USE. ALL DIMENSIONS GIVEN IN MILLIMETERS.

WALL OPENING, WIDTH: FOD+ 10 MM
WALL OPENING, HEIGHT: FOD+ 5 MM

OPERATION

WINDOW IS EQUIPPED WITH ELECTRIC LOCK AND IMPULSE CONTROL WITH SAFETY BUFFERS. AUTOMATIC LOCK IN CLOSED POSITION. MOTOR AND DRIVE ARE INTEGRATED IN THE WINDOW DESIGN. CONNECTS TO 230 V WALL OUTLET. POWER ADAPTER AND PUSH BUTTON KEYPAD WITH 2 METER CORD INCLUDED.

SURFACE FINISH

NATURAL ANODIZED ALUMINIUM AS STANDARD. CAN BE PAINTED OR ANODIZED IN OTHER COLOURS (RAL/NCS).

GLASS

6 MM LAMINATED GLASS AS STANDARD (SAFETY GLASS). POLISHED GLASS EDGES. CUSTOMIZED UP TO 9 MM THICKNESS, DEPENDING ON LOCATION AND REQUIREMENTS.

OPTIONS

AVAILABLE IN DIFFERENT DESIGNS AND IN MANUAL VERSION. PLEASE CONTACT ERGOSAFE FOR FURTHER INFORMATION.

ErgoSafe
FLEXIBLE GLASS SOLUTIONS

www.ergosafe.se

Category ELECTRICALLY OPERATED SLIDING WINDOW	Date 2023-10-30
Description H80RG 2-PANEL	Scale 1:2 (A4)
Drawn By EI	Drawing number 20020-0006
	Rev -